

## Fitting Instructions

for YewdaleVitesse<sup>®</sup> curtain tracks  
(5800W)



## Fitting Instructions

for YewdaleVitesse<sup>®</sup>  
curtain tracks (5800W)



Part no: 1010

[yewdale.co.uk](http://yewdale.co.uk)

# Fitting Instructions

YewdaleVitesse® curtain tracks (5800W)

## 5800W Hand Drawn Window Track:

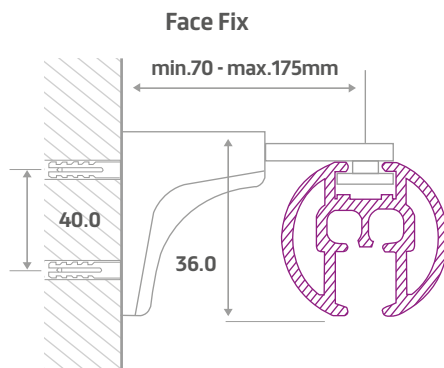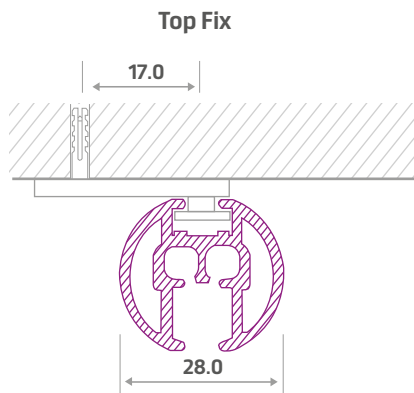



## 5800W Hand Drawn Window Track:

1. Unpack the track and brackets.
  2. If the track is top fix refer to points 3, 4 and 8. If it is face fix, refer to points 5, 6, 7 and 8.
  3. For top fix, insert the brackets onto the track at 800mm spacing, ensuring that there are no brackets further than 100mm in from either end. Once in place, tighten the screws to ensure the brackets are 90 degrees to the track.
  4. Lift the track into its desired position and fix it using the appropriate screws.
  5. Fix the face fix brackets into position, ensuring the brackets are spaced no more than 800mm apart and that there is a bracket no further than 100mm in from either end.
  6. Insert the nut from the bracket into the top of the track profile.
  7. Lift the track up and insert the screws provided into the nut in the top channel of the track and tighten.
  8. Check that the gliders move freely within the profile.
- NB. Large curtain tracks are heavy and it is important that the correct fixings are used. If unsure, seek expert advice.**



Yewdale, Enterprise Way,  
Wickford, Essex SS11 8DH

Call +44 (0)1268 570900

Email [enquiries@yewdale.co.uk](mailto:enquiries@yewdale.co.uk)

Visit [yewdale.co.uk](http://yewdale.co.uk)

For more information on all  
Yewdale products, please call  
the sales department.



yewdale **Defiant**<sup>®</sup>  
FABRIC AND BLIND SYSTEMS



yewdale **Kestrel**<sup>®</sup>  
MAGNETIC ANTI-LIGATURE SYSTEM



yewdale **Movatrack**<sup>®</sup>  
CURBICLE AND TRACK SYSTEMS



yewdale **Harrier**<sup>®</sup>  
CURBICLE AND SHOWER CURTAINS



yewdale **Vitesse**<sup>®</sup>  
CURTAIN TRACK SYSTEMS