

Fitting Instructions

for YewdaleVitesse[®] curtain tracks
(7600W)



Fitting Instructions

for YewdaleVitesse[®]
curtain tracks (7600W)

Part no: 1011


yewdale.co.uk


Fitting Instructions

YewdaleVitesse® Curtain Tracks (7600W)

Safety Instructions:

1. Loops in pull cords, chains, tapes and inner cords that operate the product can cause strangulation
2. To avoid strangulation and entanglement, keep cords out of the reach of young children. Cords may become wrapped around a child's neck
3. Move beds, cots and furniture away from window covering cords
4. Do not tie cords together. Make sure cords do not twist and create a loop


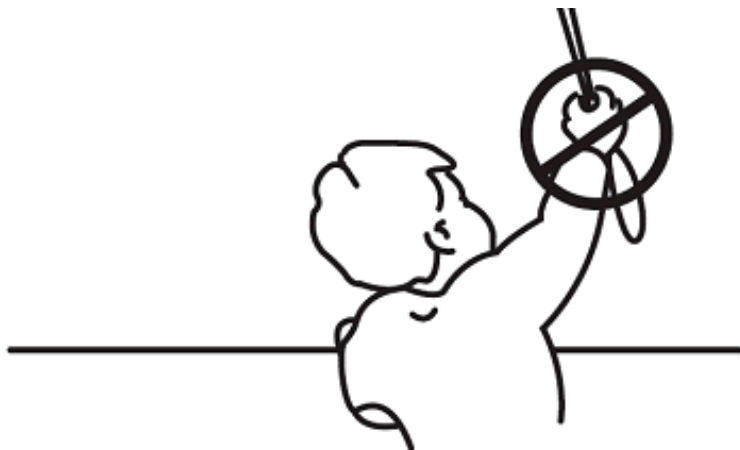


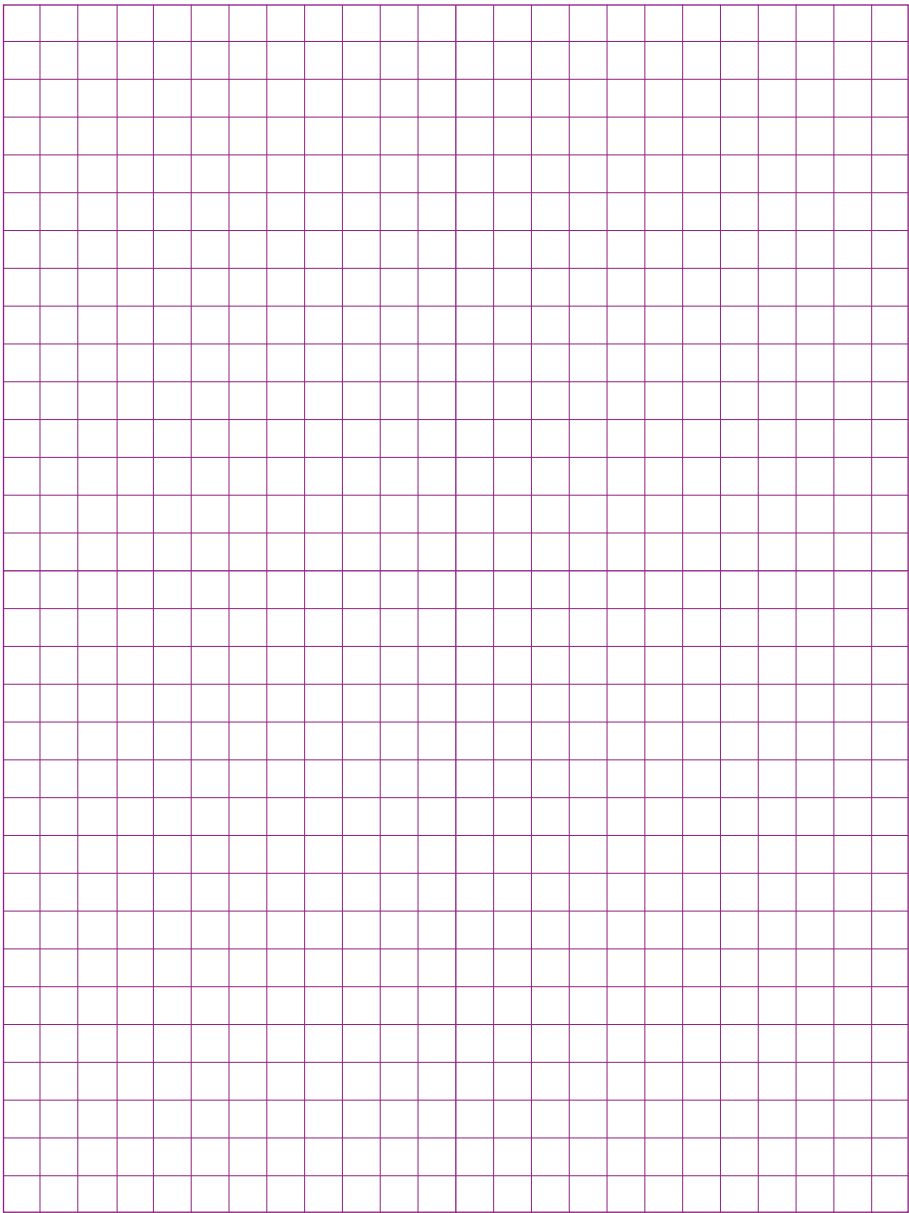

Fitting Instructions

YewdaleVitesse® Curtain Tracks (7600W)

7600W Cord Drawn Window Track:

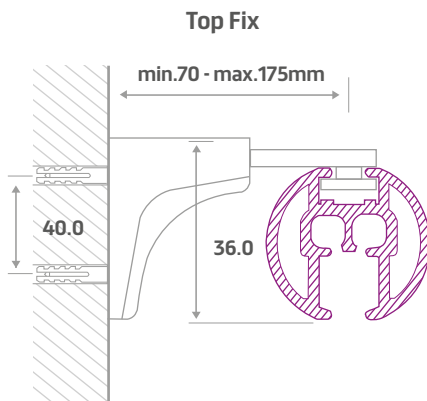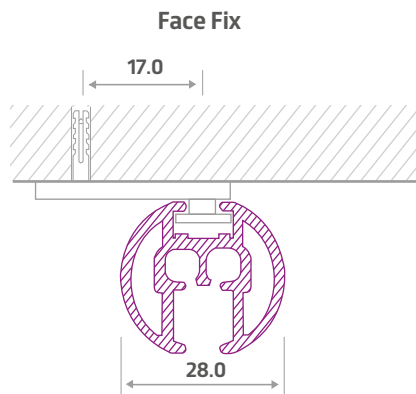




1. Unpack the track and brackets
2. If the track is top fix, refer to points 3, 4, 8, 9 and 10. If face fix, refer to points 5, 6, 7, 8, 9 and 10.
3. For top fix, insert the brackets onto the track at 800mm spacing, ensuring that there are no brackets further than 100mm in from either end. Once in place, tighten the screws to ensure the brackets are 90 degrees to the track.
4. Lift the track into its desired position and fix using the appropriate screws.
5. Fix the face fix brackets in position, ensuring the brackets are spaced no more than 800mm apart and that there is a bracket no further than 100mm in from either end.
6. Insert the nut from the bracket into the top of the track profile.
7. Lift the track up and locate the screws provided into the nut in the top channel of the track and tighten.

Fitting Instructions

YewdaleVitesse® Curtain Tracks (7600W)

8. Check that the gliders move freely within the profile.
9. Once the track is installed, put the cord weight onto the cord. If the track is top fix, a fixing must be put through the fixing ring on each of the pulleys.
10. Check that the track operates smoothly and correctly before hanging curtains.
- NB. Large curtain tracks are heavy and it is important that the correct fixings are used. If unsure, seek expert advice.
11. Ensure child safety device is used. The cord tidy should be at a maximum distance from the control mechanism, keeping the loop taut (not under excessive tension however as this could negatively affect the longevity and operation of the track). Put the retaining device on the wall, mark fixing holes with a pencil, drill the holes and screw the device to the wall with suitable fixings.

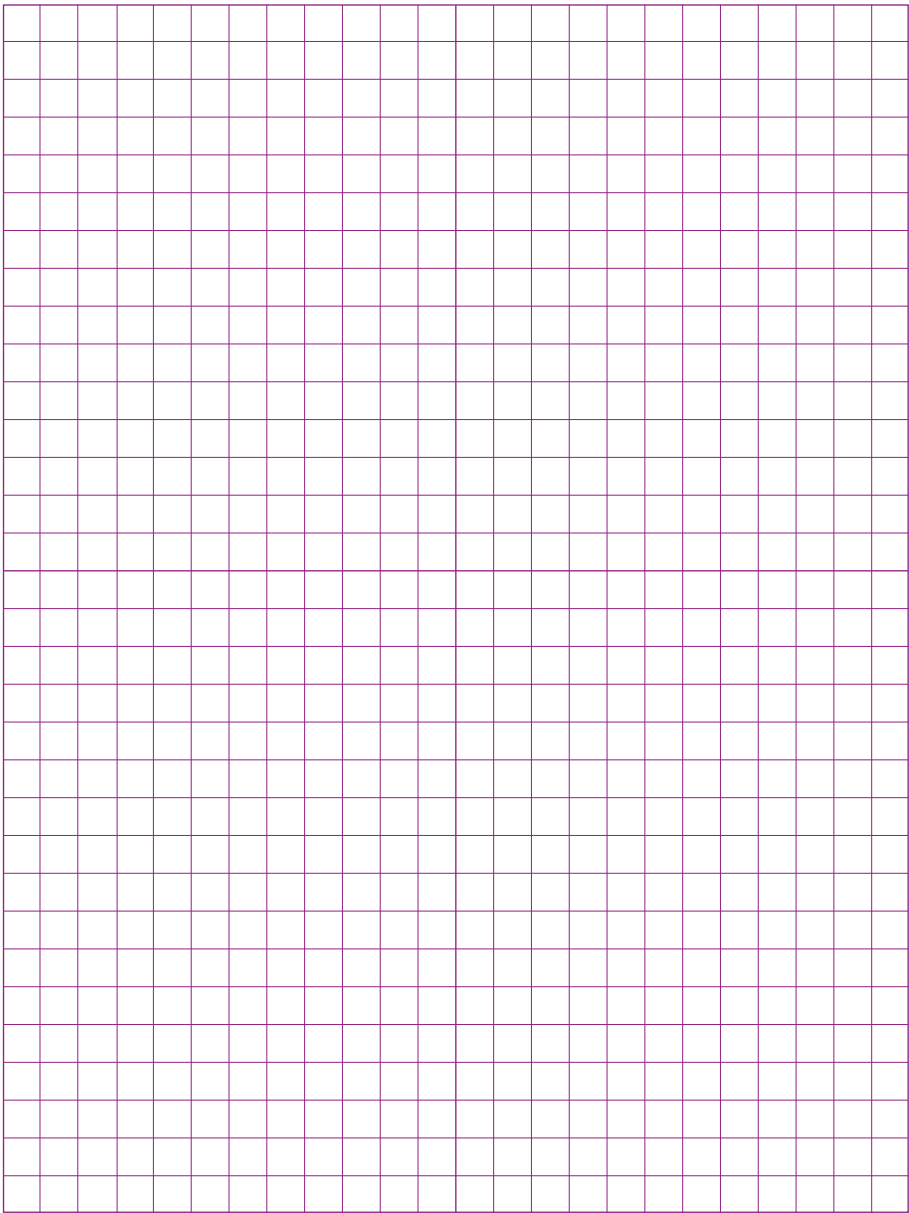



Yewdale, Enterprise Way,
Wickford, Essex SS11 8DH

Call +44 (0)1268 570900

Email enquiries@yewdale.co.uk

Visit yewdale.co.uk

For more information on all
Yewdale products, please call
the sales department.



yewdale **Defiant**[®]
FABRIC AND BLIND SYSTEMS



yewdale **Kestrel**[®]
MAGNETIC ANTI-LIGATURE SYSTEM



yewdale **Movatrack**[®]
CURBICLE AND TRACK SYSTEMS



yewdale **Harrier**[®]
CURBICLE AND SHOWER CURTAINS



yewdale **Vitesse**[®]
CURTAIN TRACK SYSTEMS