



Fitting Instructions

YewdaleDefiant[®]


Venetian Blinds (VN25, VN25S)

Part no: 1024

Please note

All blinds should be installed by a person competent in DIY.
If in doubt, please consult a professional.

Safety Instructions

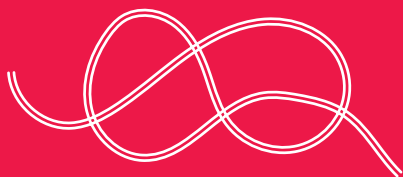

Loops in pull cords, chains, tapes and inner cords that operate the product can cause strangulation.



Keep cords out of the reach of young children.



Move beds, cots and furniture away from window covering cords




Do not tie cords together. Make sure cords do not twist and create a loop


What you'll need



Screwdriver




Drill




Measuring Tape



Pencil



Screws



Wall Plugs


What's in the box



Venetian Blind




Universal Bracket



Wand (VN25 only)



P Clip



Plastic Cleat



Warning


All instructions must be read
before installing the blind.




Fitting Time

Approx. 15 minutes

VN25
Cord & Wand Control

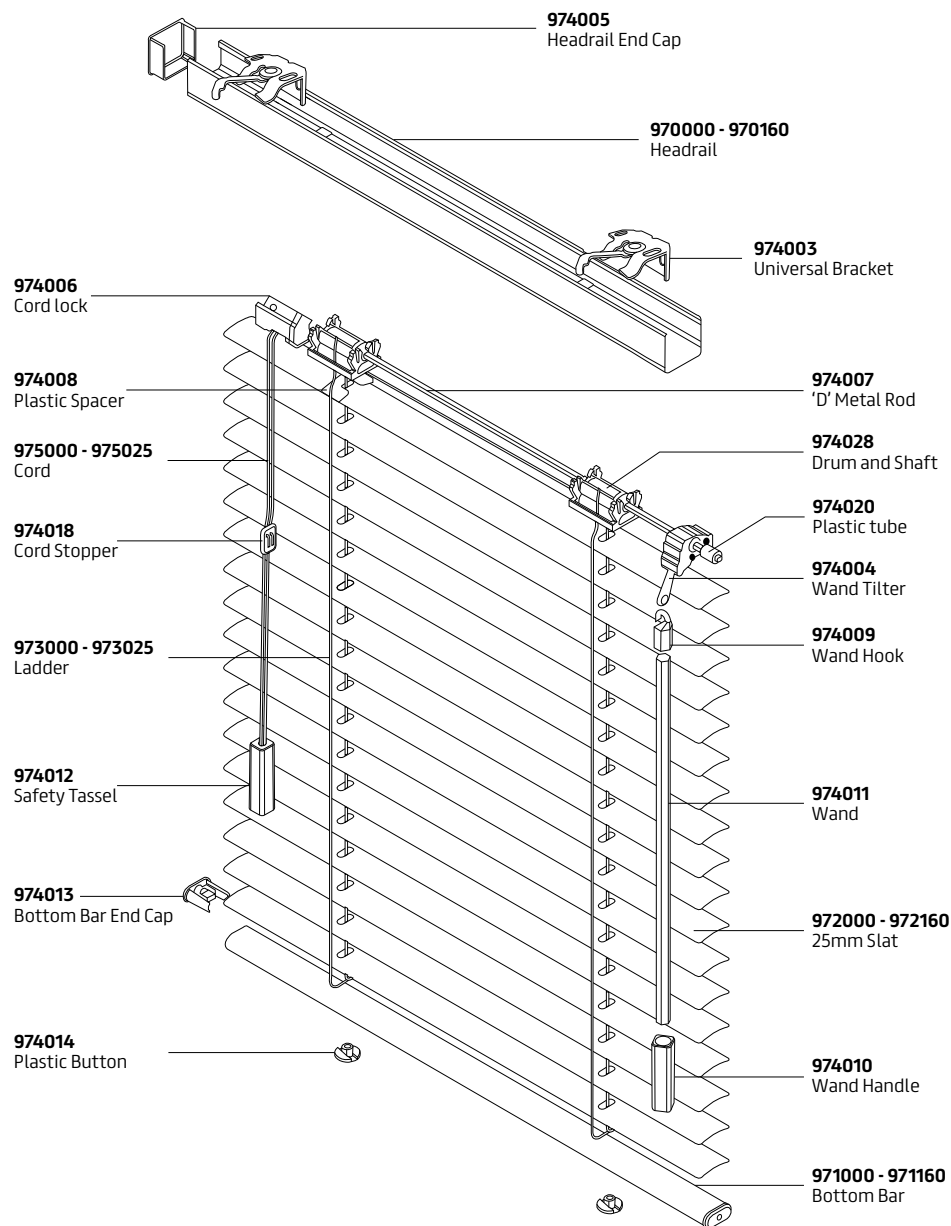


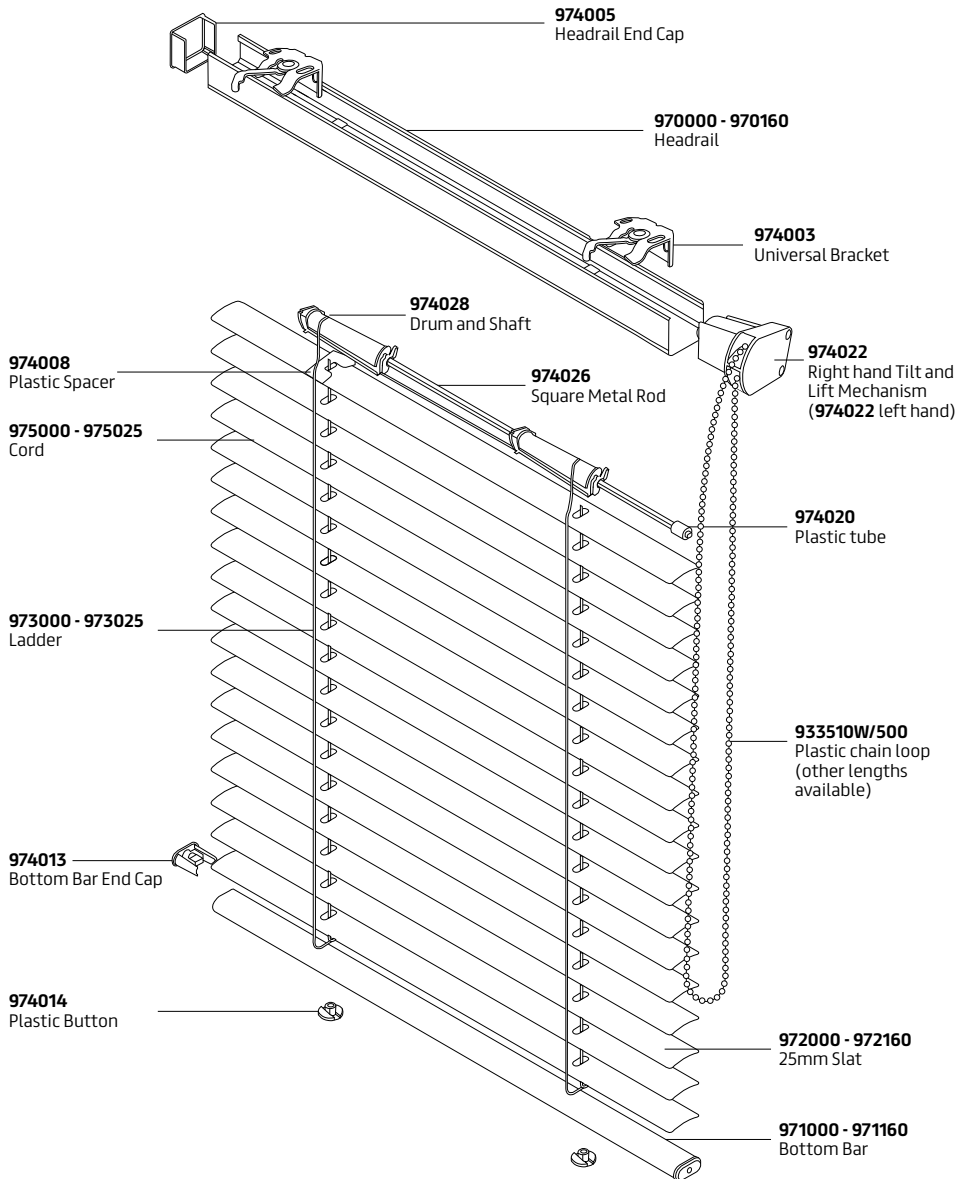


VN25, VN25S

Venetian Blinds


- 01** Headrail must be installed more than 1.5 meters from the floor for child safety reasons.

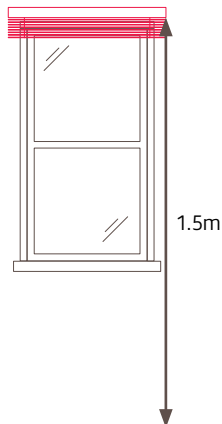


- 02** The bracket supplied is universal and maybe top or face fixed.

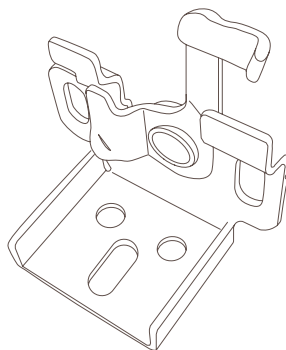

- 03** Brackets should be at least 50mm away from the mechanisms.

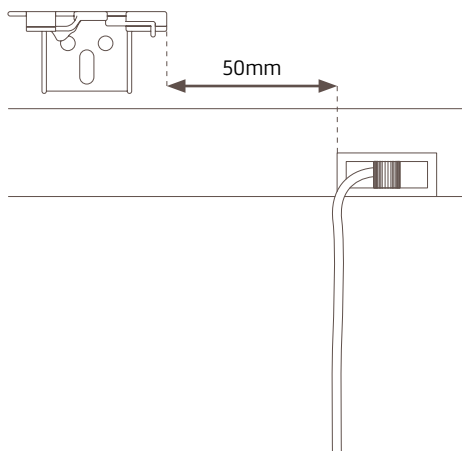


- 04**

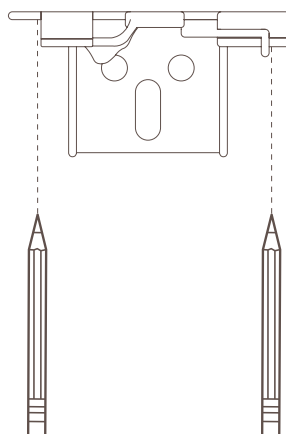


VN25, VN25S Venetian Blinds

05




06

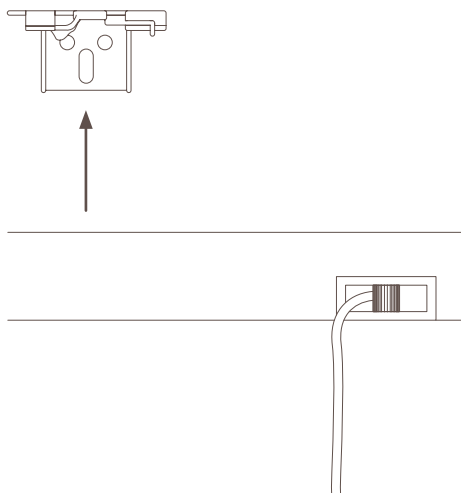


07

Open




Closed



08


Ensure the relevant child safety device is used to comply with BS EN13120:2009+A1:2014, BS EN16433:2014 and BS EN16434:2014

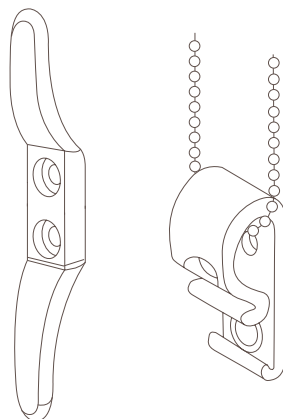


VN25

Installing the Cord Cleat

The cleat should be installed as close to the headrail as possible and no less than 1.5 meters from the floor. The cord should be tied around it in full when the blind is not in use.



Position the cleat on the wall and mark with a pencil where the screw holes will be.



Drill guide holes where the pencil marks are. Then fix the cleat with screws.




Now tie back any loose ends to keep them out of reach of children.

VN25S

Installing the Chain Tidy

The chain tidy should be at a maximum distance from the control mechanism, keeping the chain taut (not under excessive tension however as this could negatively affect the longevity and operation of the blind).

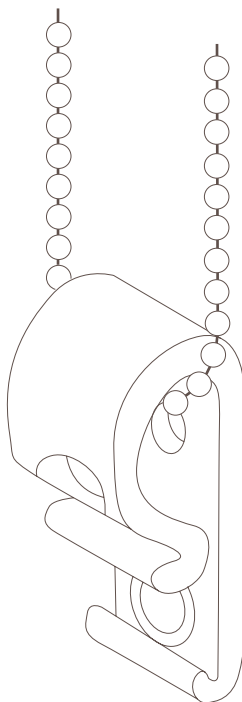



Head Office:

Enterprise Way,
Wickford, Essex, SS11 8DH
Call: +44 (0)1268 570900
Email: sales@yewdale.co.uk

London Office & Showroom:

4 Sutton Lane,
London, EC1M 5PU
Call: +44 (0)203 818 5905

For more information on all
Yewdale products, please call
the sales department.

