


Fitting Instructions
YewdaleDefiant[®]
Roller blinds
(R40)

Part no: 942

Please note

All blinds should be installed by a person competent in DIY.
If in doubt, please consult a professional.

Safety Instructions

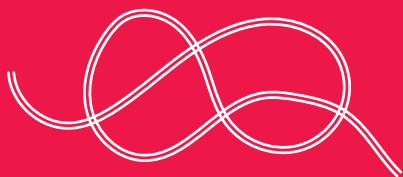

Loops in pull cords, chains, tapes and inner cords that operate the product can cause strangulation.



Keep cords out of the reach of young children.



Move beds, cots and furniture away from window covering cords




Do not tie cords together. Make sure cords do not twist and create a loop


Please note

All blinds should be installed by a person competent in DIY.
If in doubt, please consult a professional.


What you'll need




Screwdriver




Drill



Measuring Tape




Pencil



Screws

What's in the box



Roller Blind



Bracket



Bracket Cover



Warning

All instructions must be read
before installing the blind.



Fitting Time

Approx. 15 minutes





Need Extra Help?

You can find a helpful installation video by simply
scanning this QR Code or visiting our website

www.yewdale.co.uk/videos-page

R40 (53/70) Sidewider Control

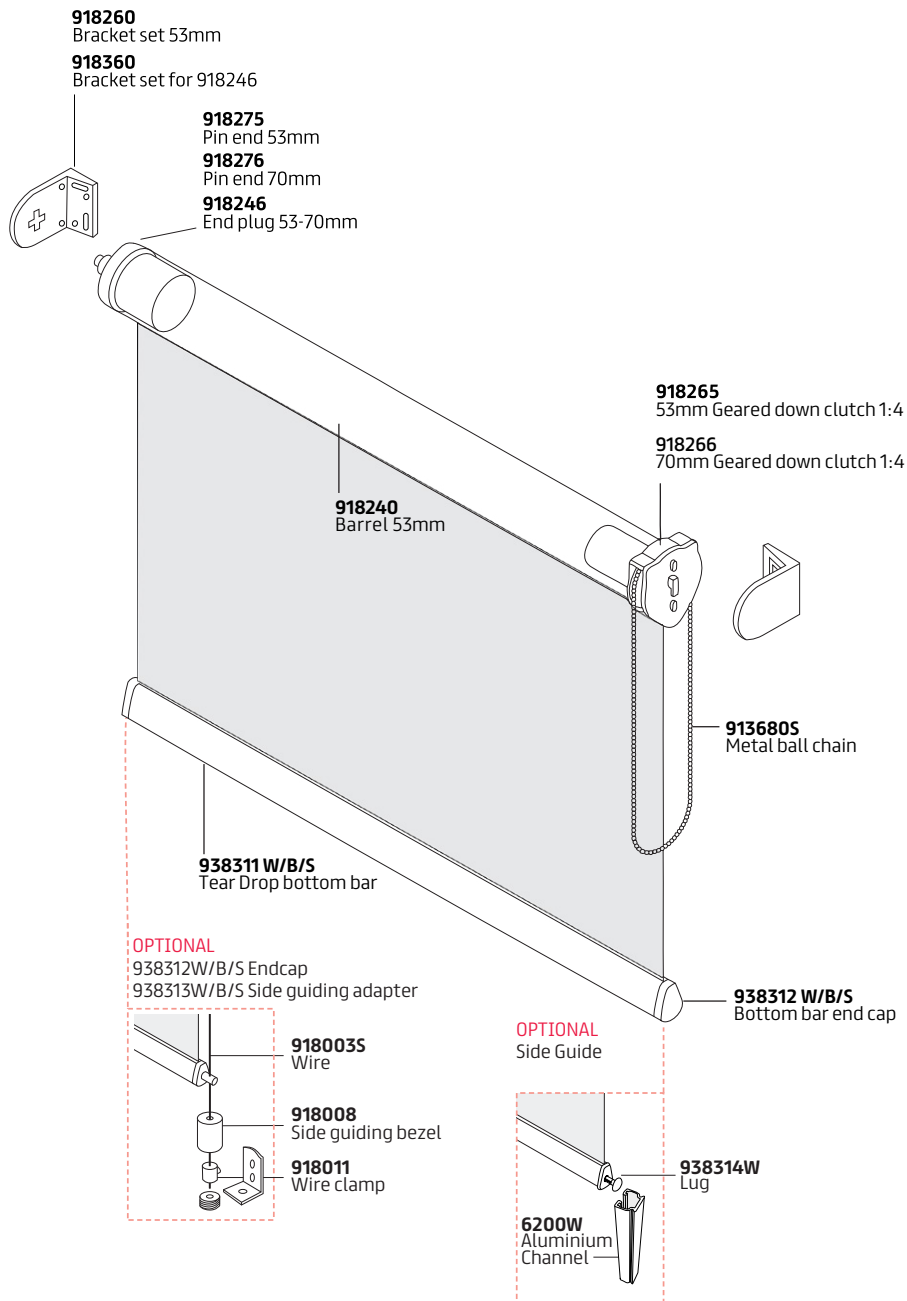


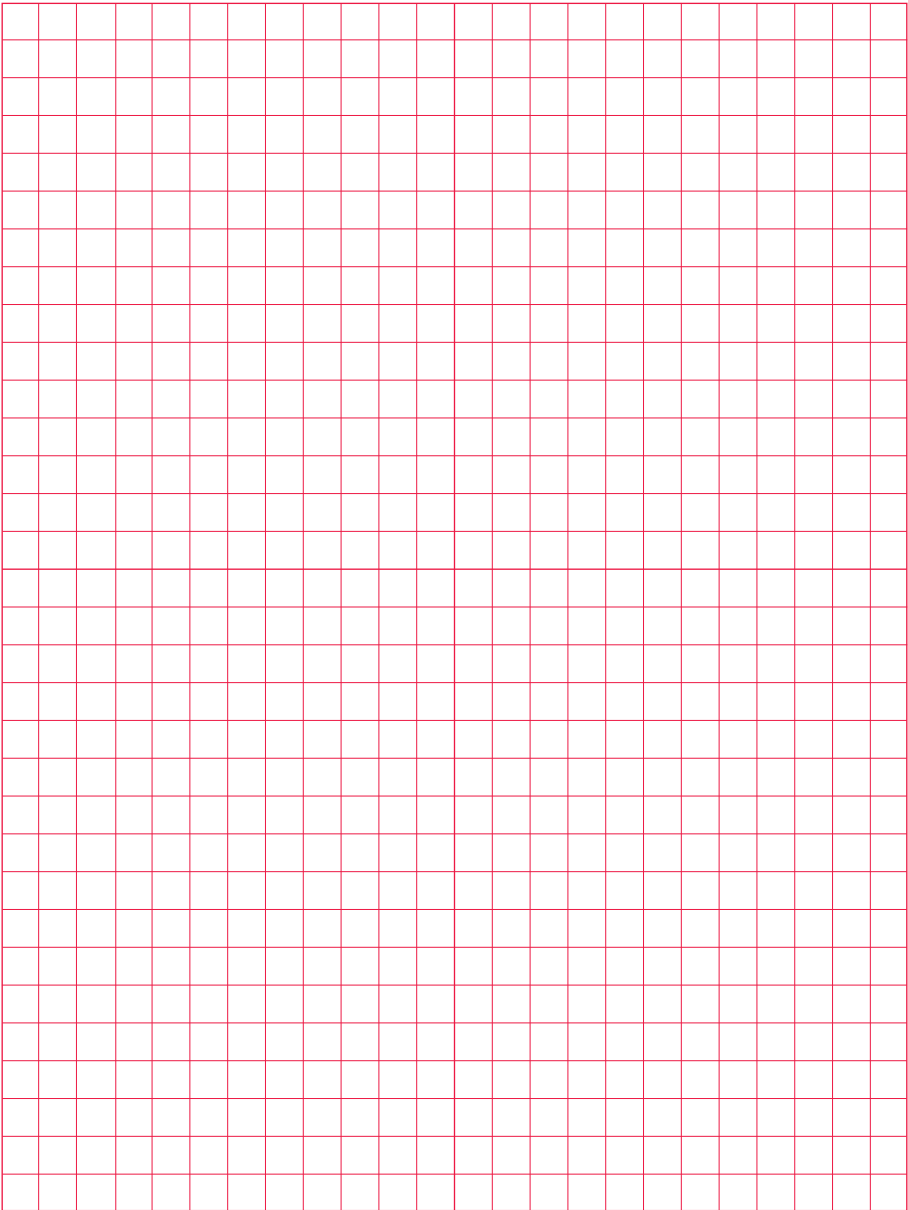


R40 (53/70)

Sidewider Control


- 01** The metal brackets supplied with the blind may be top-fixed and the bracket covers are added before fitting the blind.

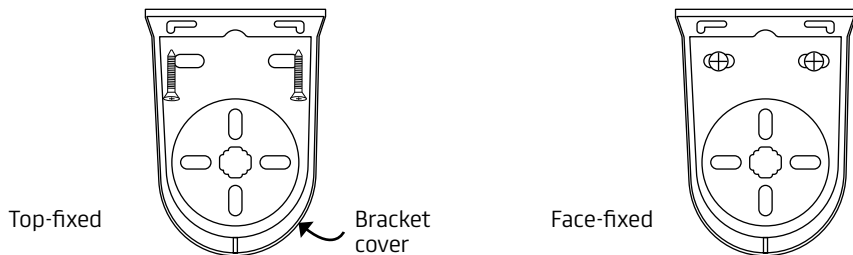

- 02** Check that the blind fits correctly. The fabric should roll off the BACK of the barrel, unless ordered as a reverse-roll.

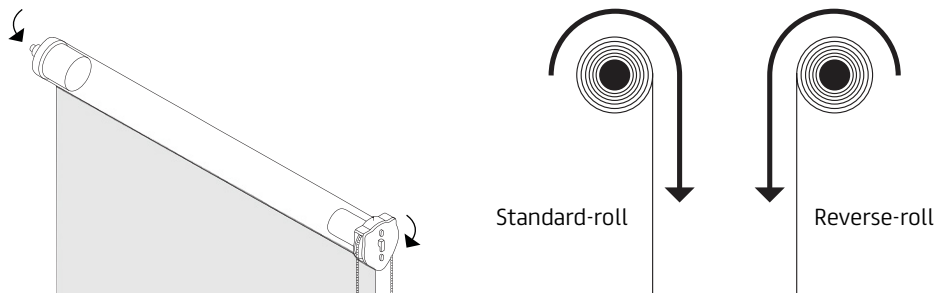


- 03** Fix the control-end bracket using appropriate screws/plugs.

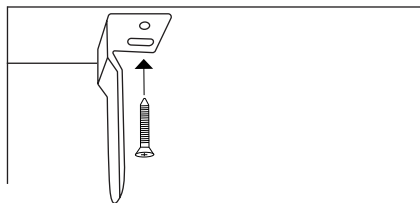


R40 (53/70)

Sidewider Control



- 04** Locate the blind into the control-end bracket, and mark the position of pin end bracket.

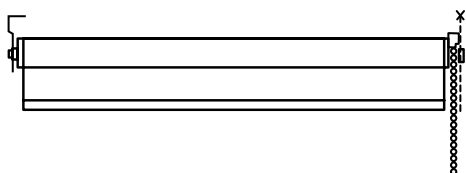

- 05** Remove the blind and fix the pin-end bracket using appropriate screws/ plugs.

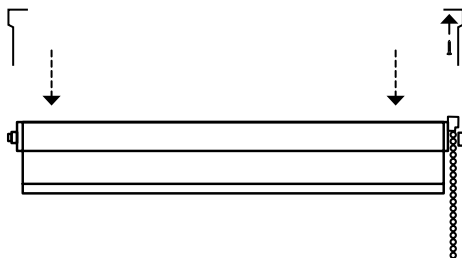

- 06** Slot the lug on the control-end into the bracket. The lug must be vertical and must drop down into the cross-shaped opening. Next, push the springloaded pin into the pin-end bracket. **Note: If only side guide or side guide wire is requested.**

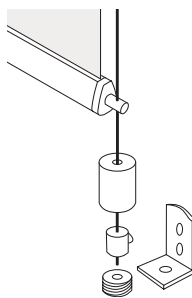
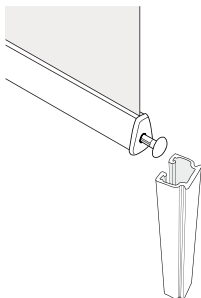


- 07** Ensure the relevant child safety device is used to comply with BS EN13120:2009+A1:2014, BS EN16433:2014 and BS EN16434:2014

R40 (53/70)

Sidewider Control

- 08** Insert the pin in the pin-end of the blind into the bracket. Insert the lug on the control-end into bracket. The lug must be vertical and must drop down into the cross-shaped opening.

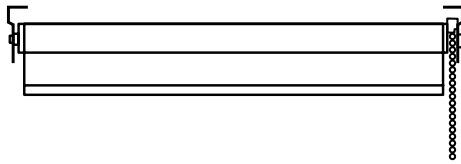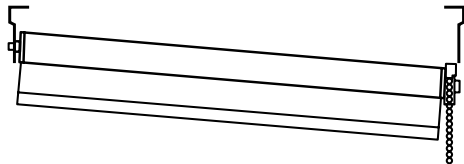


- 09** Check that the blind operates correctly.

N.B. Large blinds are heavy and it is important that the correct fixings are used.

R40 (53/70)

Installing the Chain Tidy

The chain tidy will be attached to the chain when the blind arrives. The chain tidy should be at a maximum distance from the control mechanism, keeping the chain taut (not under excessive tension however as this could negatively affect the longevity and operation of the blind). Put the retaining device on the wall, mark fixing holes with a pencil, drill the holes and screw the device to the wall with suitable fixings.

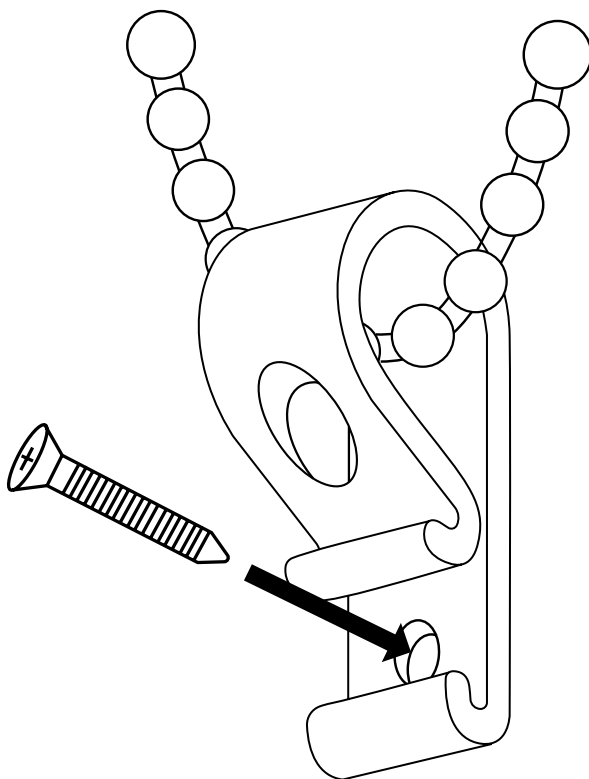



Head Office:

Enterprise Way,
Wickford, Essex, SS11 8DH
Call: +44 (0)1268 570900
Email: sales@yewdale.co.uk

London Office & Showroom:

4 Sutton Lane,
London, EC1M 5PU
Call: +44 (0)203 818 5905

For more information on all
Yewdale products, please call
the sales department.

