




Fitting Instructions
YewdaleDefiant®
Roller blinds
(R54)

Part no: 947

Please note

All blinds should be installed by a person competent in DIY.
If in doubt, please consult a professional.

Safety Instructions

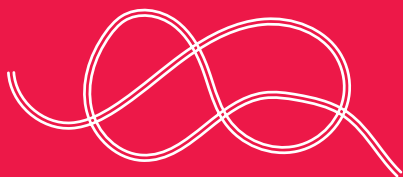

Loops in pull cords, chains, tapes and inner cords that operate the product can cause strangulation.



Keep cords out of the reach of young children.



Move beds, cots and furniture away from window covering cords




Do not tie cords together. Make sure cords do not twist and create a loop


Please note

All blinds should be installed by a person competent in DIY.
If in doubt, please consult a professional.


What you'll need




Screwdriver




Drill



Measuring Tape




Pencil



Screws

What's in the box



Roller Blind



Bracket



Bracket Cover



Warning

All instructions must be read
before installing the blind.



Fitting Time

Approx. 15 minutes





Need Extra Help?

You can find a helpful installation video by simply
scanning this QR Code or visiting our website

www.yewdale.co.uk/videos-page


R54 Crank Control

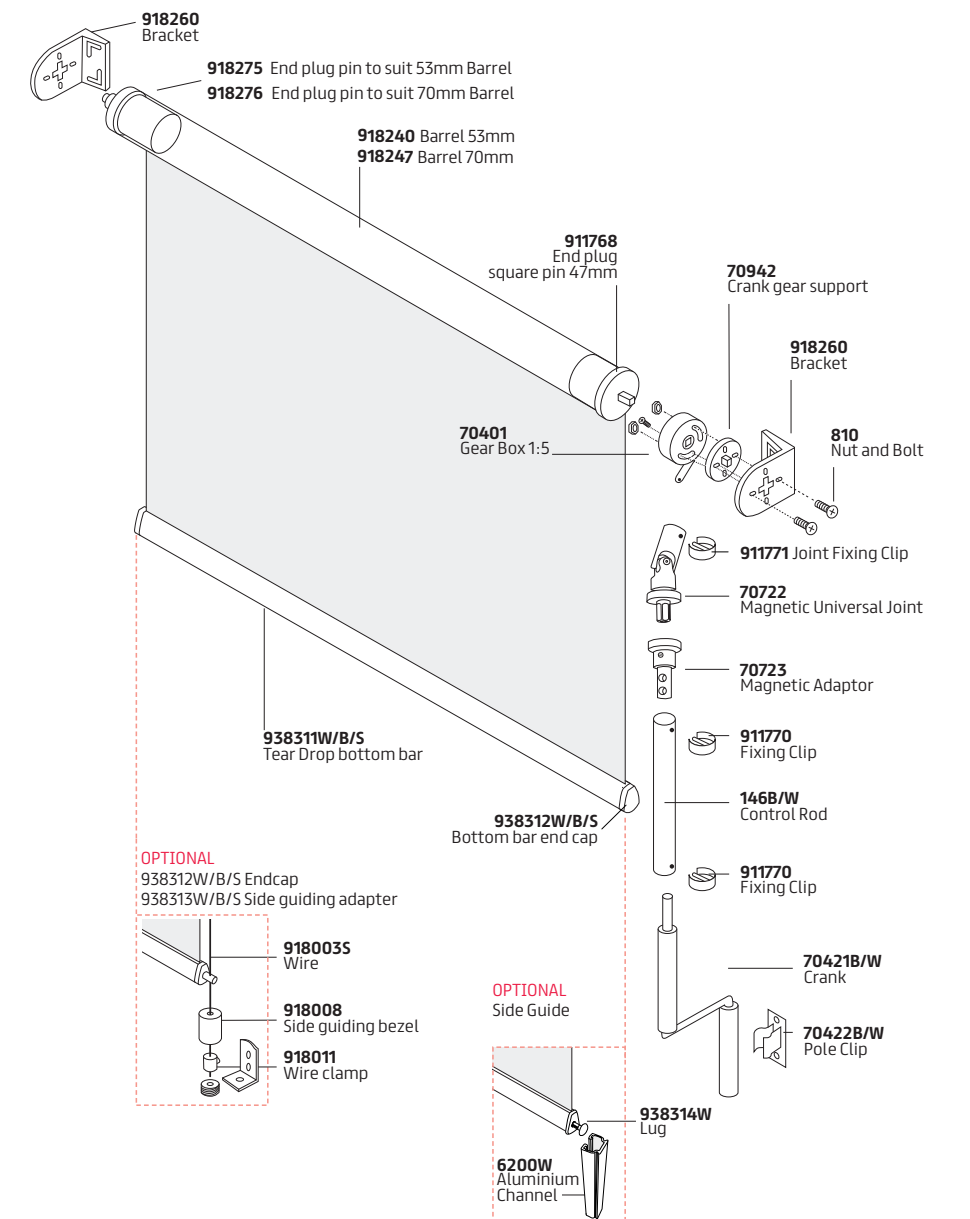

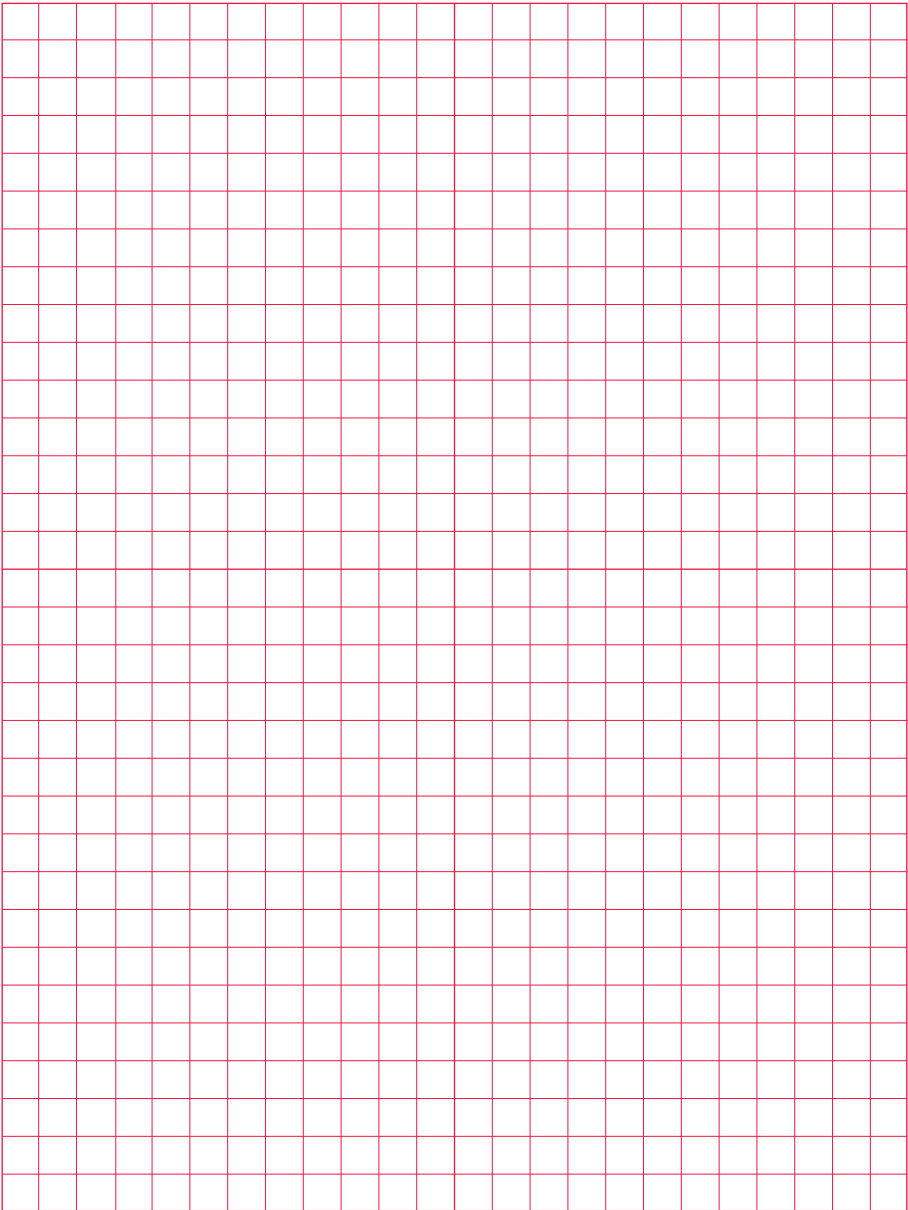


R54 Crank Control


- 01** The metal brackets supplied with the blind may be top or face-fixed and the bracket covers are added before fitting the blind.

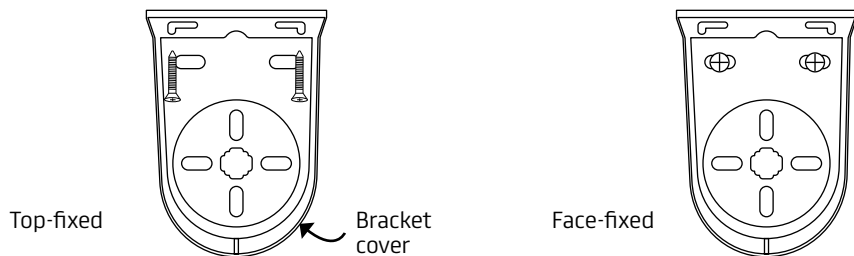


- 02** Check that the blind fits correctly. The fabric should roll off the back of the barrel, unless ordered as reverse-roll. The control-end of the blind has a fixed square pin. The pin-end has a rotating square pin.

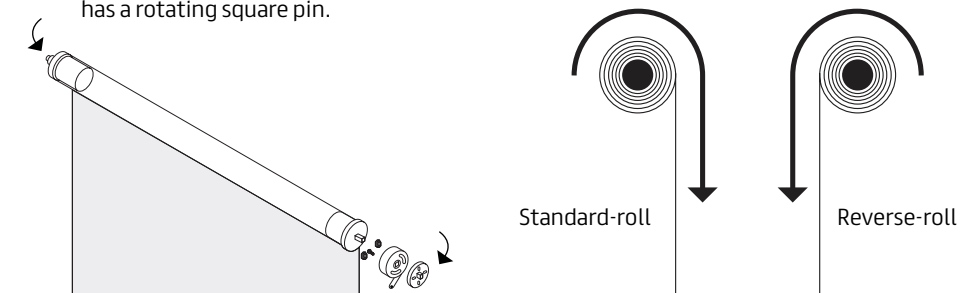

- 03** Fix the control end bracket using appropriate screws/plugs.

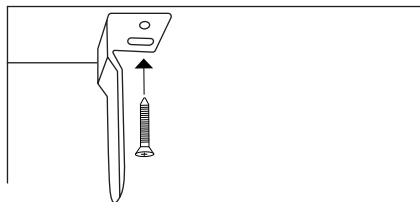


The gear outlet may be repositioned if necessary. To do this, undo the two screws holding the gearbox to the bracket, reposition the gearbox and refit the screws.




R54

Crank Control

- 04** Locate the control-end of the blind into the gearbox, and mark the position of the pin-end bracket.

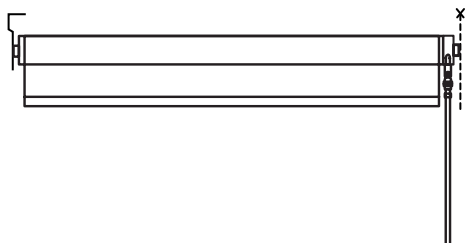


- 05** Remove the blind and fix pin-end bracket using appropriate screws/plugs.

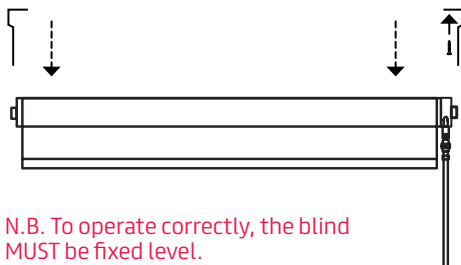


N.B. To operate correctly, the blind **MUST** be fixed level.



- 06** Using a 2mm HSS drill bit, drill a pilot hole through a suitable point in the control end bracket, taking care not to drill through the bracket cover.



- Fix security screw into pilot hole to secure gearbox to the bracket. Screw head must not protrude the groove it is located in.



- 07** Locate the blind into its brackets, inserting the control end first. Suppress the pin end and insert it into the bracket.

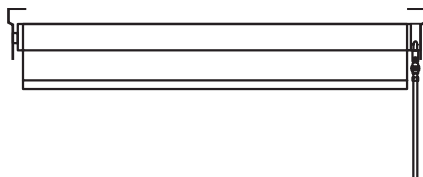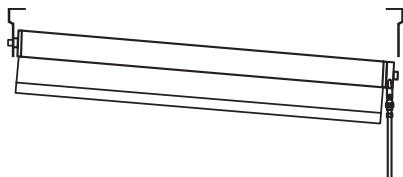

- 08** Check that the blind operates correctly.

N.B. Large blinds are heavy and it is important that the correct fixings are used.



Head Office:

Enterprise Way,
Wickford, Essex, SS11 8DH

Call: +44 (0)1268 570900

Email: sales@yewdale.co.uk

For more information on all
Yewdale products, please call
the sales department.

