



Fitting Instructions

YewdaleKestrel[®]

Fixed Mounting Plate (K08BW/K08CW)

Part no: 992


What you'll need




Screwdriver



Drill



Measuring Tape




Pencil


What's in the box




K08BW
Mounting Plate




Security Screws (x2)




Magnets (x2)




Washer (x2)




K08CW
Mounting Plate



Security Screws (x4)



Magnets (x4)



Washer (x4)



Warning

All instructions must be read
before installing.





Fitting Time

Approx. 10 - 20 minutes



depending on product type/fixing substrate

Mounting Plate

Instructions for K08BW

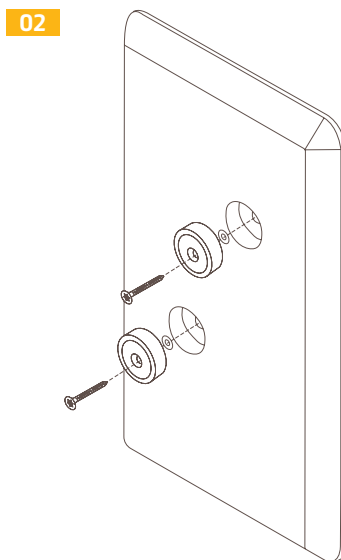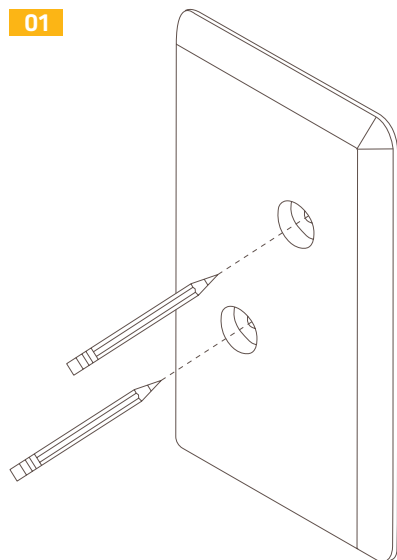


03 Ensure that the screw is not raised above the bracket body.

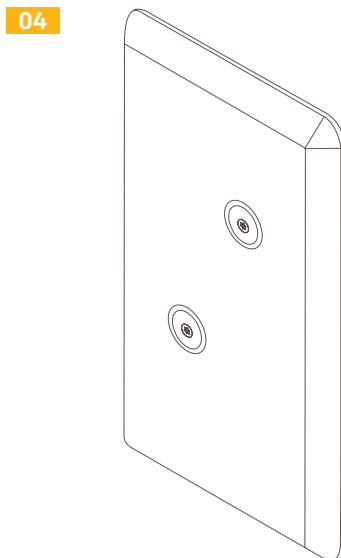


Mounting Plate

Instructions for K08CW

01

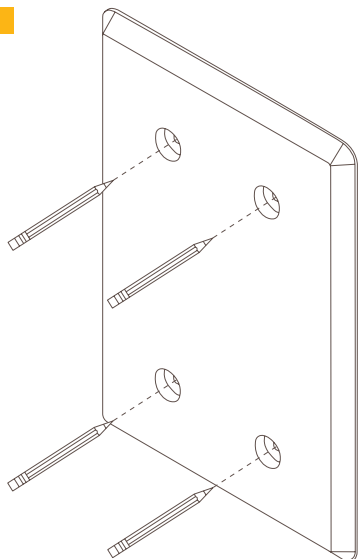


02

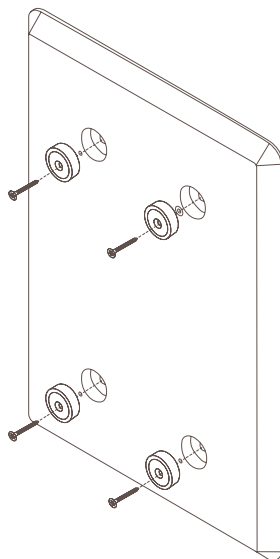


03

Ensure that the screw is not raised above the bracket body.



04

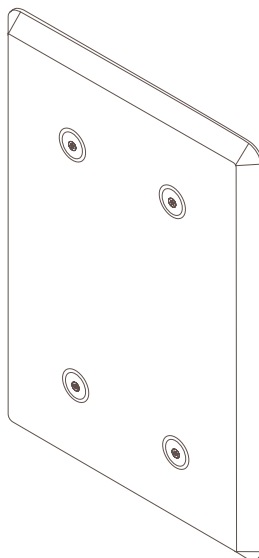

Mounting Plates

Testing & Accessories

Testing

Test the completed installation. The downward force needed to part the brackets should never be more than 400N (40kg static load) at any point.

Fitting Accessories To Back Plates

- Using the back plate, mark the fixing locations on the rear of the accessories.
- Double-check to make sure there is no clash with any workings of the accessories inside.
- Drill a hole the correct size to receive the rivet provided.
- Once ready, secure the KD4S disc supplied with the rivet and the penny washer to the inside of the accessory.
- Please ensure the disc is fixed securely to the accessories and can't be removed.
- Offer the accessories to the plate to ensure the magnet and the disc align.
- Once you have confirmed this, the installation is complete.
- Should you require it, add anti-pick silicone to the edge of the plate. This is up to your discretion.

Please note: Security screws can be used if preferred (Part numbers KT1, KT3)

Mounting Plates

Warning

The magnetic element of the YewdaleKestrel® bracket is POWERFUL. Handle with care. If attached to a flat steel surface, it may be difficult to remove the magnet. DO NOT PLACE NEAR SENSITIVE ELECTRONIC EQUIPMENT.

YewdaleKestrel® products are designed as standalone products only. Care should be taken when assessing or arranging a room to ensure that YewdaleKestrel® products cannot be misused in conjunction with any other item, furniture or fixings in the room.

It is the responsibility of the end user or client to ensure the product is suitable for the environment it is being installed in. YewdaleKestrel® products must be fitted by a qualified professional following the manufacturer's instructions. Failure to do so could jeopardise the product's effectiveness as an anti-ligature system. All installations must be checked and commissioned on completion to ensure the downward forces does not exceed the maximum nor that it is breaking away below the normal force. It is highly recommended that sign off proof that the product is installed and commissioned correctly is issued to the client after installation.



For more information on installations, using the systems safely, load testing and maintenance, please scan the QR code to read our YewdaleKestrel® Policy.



Head Office:

Enterprise Way,
Wickford, Essex, SS11 8DH
Call: +44 (0)1268 570900
Email: sales@yewdale.co.uk

For more information on all
Yewdale products, please call
the sales department.

