

Manufacturing Instructions

for YewdaleKestrel[®] Curtain Track
(K2500)


Manufacturing Instructions for YewdaleKestrel[®] Curtain Track (K2500)




Curtain Tracks

Manufacturing Instructions

Face Fix

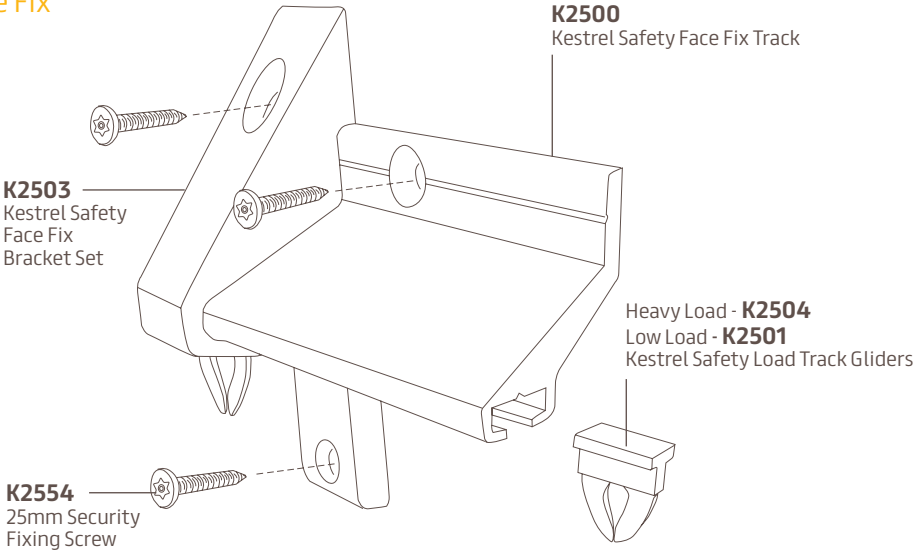


Top Fix

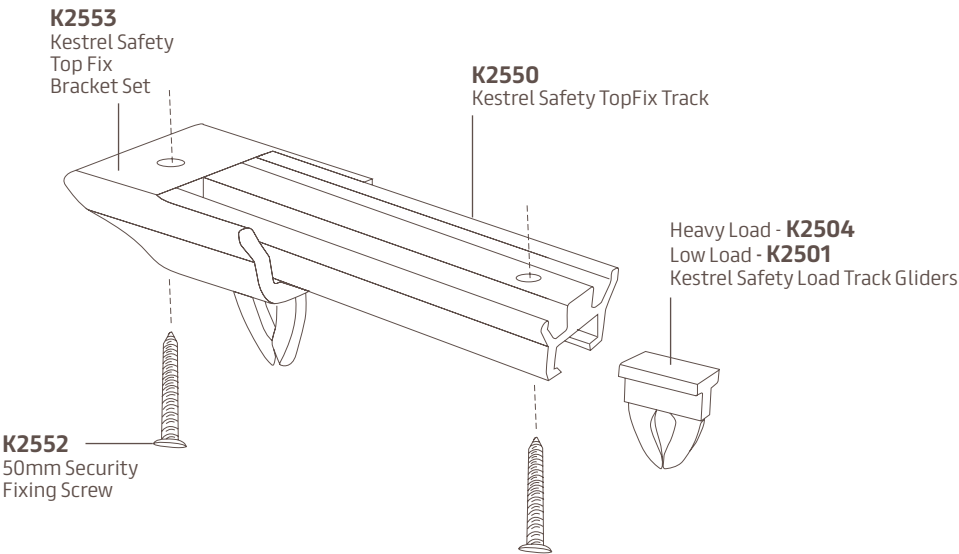


Curtain Tracks

Manufacturing Instructions

Track Cutting Specifications



5mm deduction



36mm deduction

01 Face fix

Finished Track width minus 5mm
= Manufacturing Cut Length

02 Top fix

Finished Track width minus 36mm
= Manufacturing Cut Length


Details:

Deduction accounts for end caps, brackets, and fitting clearances. Ensure square, clean cuts to maintain alignment when installed. Deburr all cut edges to prevent obstruction of gliders. This ensures correct fit and performance during installation.


Curtain Tracks

Manufacturing Instructions

03 Face fix

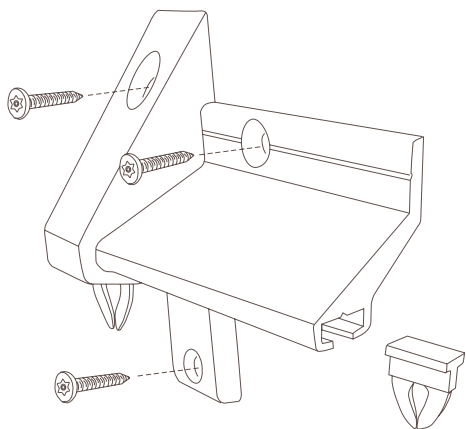

04 Top fix

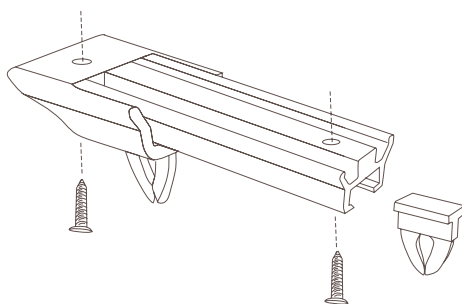


- Fix to an adequate structure.
- If fixing to a timber batten, ensure it is longer than the brackets.
- Use anti-pick mastic as required.

Curtain hook recommendations

Testing of weight loads carried out on 3mm thick hooks



Please note



- The safety track requires 16 gliders per meter.
- Suited for non-pleated curtains (curtains with a heading tape)
- Inside of track profile to be lubricated for effective operation once installed.


Curtain Tracks



Warning


- YewdaleKestrel® products are designed as standalone products only.
- Care should be taken when assessing or arranging a room to ensure that YewdaleKestrel® products cannot be misused in conjunction with any other item, furniture or fixings in the room.
- It is the responsibility of the end user or client to ensure the product is suitable for the environment it is being installed in.
- YewdaleKestrel® products must be fitted by a qualified professional with an up to date training certificate and in accordance with the manufacturer's instructions.
- Failure to do so could jeopardise the product's effectiveness as an anti-ligature system.
- All installations must be checked and commissioned on completion to ensure the downward forces does not exceed the maximum nor that it is breaking away below the normal force.
- It is highly recommended that sign off proof that the product is installed and commissioned correctly is issued to the client after installation.

Tests carried out using 3mm wide curtain hook




Option 1 - Low Weight

12 - 17kg load release
with all white gliders



Option 2 - Standard

18 - 24kg load release
with alternating grey
and white gliders



Option 3 - Heavy Weight

30 - 36kg load release
with all grey gliders



For more information on installations, using the systems safely, load testing and maintenance, please scan the QR code to read our YewdaleKestrel® Policy.



Head Office:

Enterprise Way,
Wickford, Essex, SS11 8DH

Call: +44 (0)1268 570900

Email: sales@yewdale.co.uk

For more information on all
Yewdale products, please call
the sales department.



yewdale **Defiant**[®]
FABRIC AND BLIND SYSTEMS

yewdale **Kestrel**[®]
MAGNETIC ANTI-LEGATURE SYSTEM

yewdale **Movatrack**[®]
CURTICLE AND TRACK SYSTEMS

yewdale **Harrier**[®]
CURTICLE AND SHOWER CURTAINS

yewdale **Vitesse**[®]
CURTAIN TRACK SYSTEMS